



CORNERBLOCK FABRICS (ENNIS FABRICS):

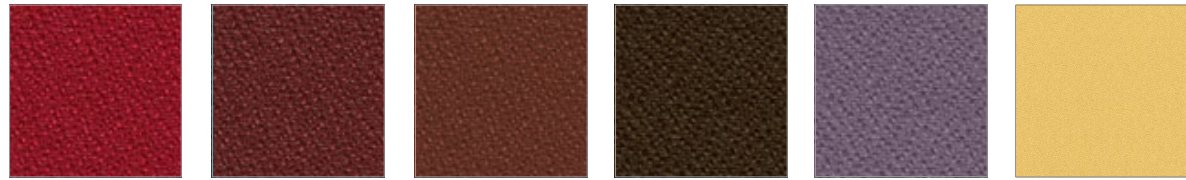

Red 14 Burgundy 108 Terracotta 405 Brown 87 Purple 1009 Gold 59

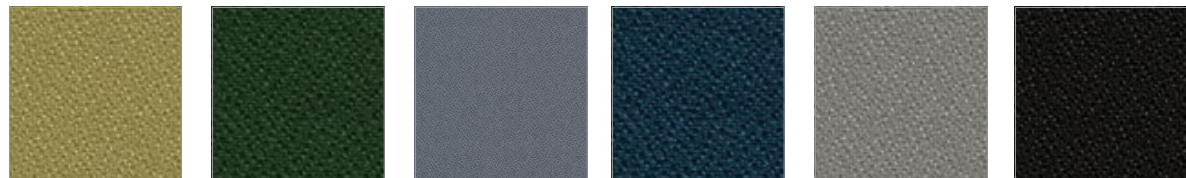

Eucalyptus 64 Green 208 Mist 32 Navy 308 Charcoal 908 Black 9009

FOUNDATION FABRICS (ENNIS FABRICS):



Fawn 67 Radiant Orchid 102 Lilac 105 Rosewood 108 Hemlock 202 Linen 608 Beaver 808



Wind Chime 905 Mud 908 Air 3003 Denim 3006 Zantium 3009 Old Gold 4009 Buff 6009



Saddlewood 8006 Coffee 8009 Steel 9003 Licorice 9009

CORNERBLOCK:

CONTENT: 100% Polyester
 BACKING CONTENT: 100% Acrylic
 ABRASION: Exceeds 420,000 Double Rubs: Contract Rated
 SEAM SLIPPAGE: ASTM D4034: Warp = 61 lbs Fill = 66 lbs
 TEAR STRENGTH: ASTM D2261: Warp = 54 lbs Fill = 72 lbs
 TENSILE STRENGTH: ASTM D5034: Warp = 491 lbs Fill = 364 lbs
 CROCKING: AATCC 8: Dry = Class 4.5, Wet = Class 4.5
 PILING: ASTM D3511: Class 4.5
 UV/LIGHT FASTNESS: AATCC 16: Class 4.5, 40 Hours
 FIRE RETARDANCY*: California Bulletin 117 - Section E
 UFAC Class 1, MVSS 302, NFPA 260 Class 1
 WEIGHT: 17.51 Ounces per Linear Yard
 11.06 Ounces per Square Yard
 WIDTH: 57" (145 cm)
 ROLL SIZE: 50 Yards
 CLEANING INSTRUCTIONS: S - Solvent Cleaner

FOUNDATION:

CONTENT: 100% Polyester
 BACKING CONTENT: 100% Polyester
 ABRASION: Exceeds 100,000 Double Rubs
 SEAM SLIPPAGE: ASTM D4034: Warp = 64 lbs Fill = 70 lbs
 TEAR STRENGTH: ASTM D2261: Warp = 36 lbs Fill = 24 lbs
 TENSILE STRENGTH: ASTM D5034: Warp = 335 lbs Fill = 168 lbs
 CROCKING: AATCC 8: Dry = Class 4.5, Wet = Class 4.5
 PILING: ASTM D3511: Class 4.5
 UV/LIGHT FASTNESS: AATCC 16: Class 3
 FIRE RETARDANCY*: California Bulletin 117 - Section E
 UFAC Class 1, MVSS 302, NFPA 260 Class 1
 WEIGHT: 17.75 Ounces per Linear Yard
 11.21 Ounces per Square Yard
 WIDTH: 57" (144.78 cm)
 ROLL SIZE: 55 Yards
 CLEANING INSTRUCTIONS: WC - Wash with care.

ALL FABRICS: *The term and any corresponding data refer to typical performance in the specific tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions. This information is offered for our general information only. It's accurate to the best of our knowledge and is not intended to relieve the user from its responsibility to investigate and understand other pertinent sources of information and to comply with all laws and procedures applicable to the safe handling and use of this material. Final determination of the suitability of any product for an application rests with the user.

JOURNEY FABRICS (ENNIS FABRICS):



JOURNEY:

CONTENT: 100% Polyester
BACKING CONTENT: 100% Acrylic
ABRASION: Exceeds 125,000 Double Rubs
SEAM SLIPPAGE: ASTM D4034: Warp = 135 lbs Fill = 130 lbs
TEAR STRENGTH: ASTM D2261: Warp = 20 lbs Fill = 17 lbs
TENSILE STRENGTH: ASTM D5034: Warp = 295 lbs Fill = 194 lbs
CROCKING: AATCC 8: Dry = Class 4.5, Wet = Class 4.5
PILING: ASTM D3511: Class 4.5
UV/LIGHT FASTNESS: ASTM D3597-02(2013)--Fading 5.0-40 hrs.
FIRE RETARDANCY*: California Bulletin 117 - Section E
 UFAC Class 1, MVSS 302, NFPA 260 Class 1
WEIGHT: 14.88 Ounces per Linear Yard
 9.74 Ounces per Square Yard
WIDTH: 55" (140 cm)
ROLL SIZE: 55 Yards
CLEANING INSTRUCTIONS: MWC - Machine Wash with care.

CHALLENGER VINYL (ENNIS FABRICS):



CHALLENGER:



CONTENT: 100% Polyvinyl Chloride (PVC)
BACKING CONTENT: 100% Polyester
ABRASION: Exceeds 1,500,000 Double Rubs
FINISH: Endurepel Armour
COLD CRACK: -55°C (-67°F)
TEAR STRENGTH: ASTM D2261: Warp = 10 lbs Weft = 13 lbs
TENSILE STRENGTH: ASTM D5034: Warp = 101 lbs Weft = 94 lbs
UV/LIGHT FASTNESS: AATCC 16.3 - Grade 4 (1500 Hrs)
ELONGATION: ASTM D571: Warp = 64%, Weft = 116%
FIRE RETARDANCY*: CALTB117-2013, IMO FTP Code 2010 - Part 8
 MVSS 302, NFPA 260 Class 1, UFAC Class 1
WEIGHT: 736 Grams per Square Meter
 33.17 Ounces per Linear Yard
 21.71 Ounces per Square Yard
WIDTH: 55" (140 cm)
ROLL SIZE: 30 Yards (27 m)
CLEANING INSTRUCTIONS: W - Clean fabrics with water-based cleaning agents or water based foam. Dilution ratios must be followed. Materials must be wiped with clean water after use and wiped dry with a clean cloth.